







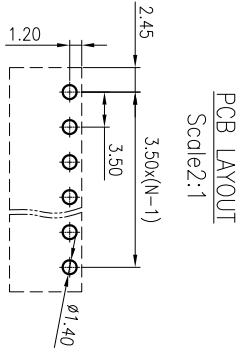
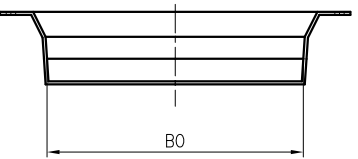
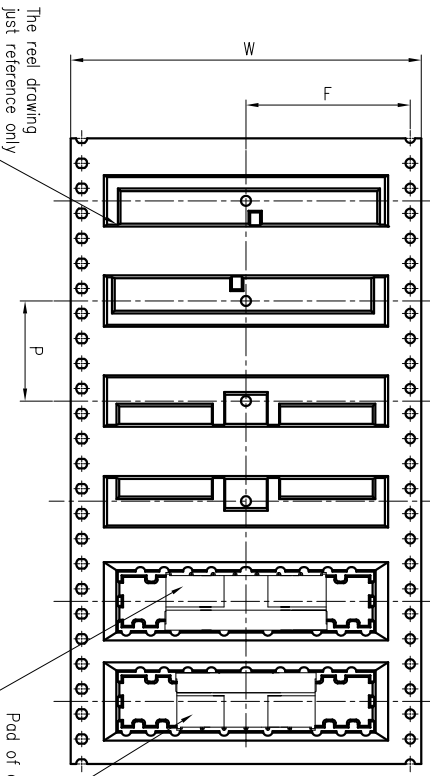


PRODUCT DRAWING Scale 2:1

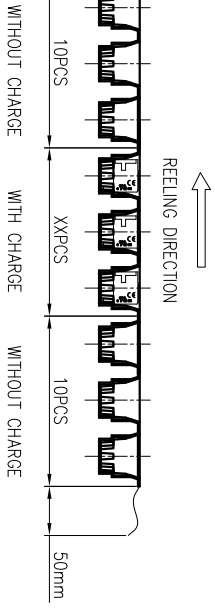

The pad is positioned centrally above the existing positions.



Reel Name	POLE	Width /W	Pitch /P	Width /F	Width/BO per reel	Qty. per carton	Reel qty.	Qty. per carton
15EDGM-THR-3.5-SINGLE POLE REEL(2)	3	32mm	12mm	14.25mm	18.41mm	470	8	3760
15EDGM-THR-3.5-DOUBLE POLE REEL(2)	24	32mm	12mm	14.25mm	18.41mm	470	8	3760
15EDGM-THR-3.5-SINGLE POLE REEL(5)	5,7,9,11	56mm	12mm	26.25mm	40.20mm	470	5	2350
15EDGM-THR-3.5-DOUBLE POLE REEL(5)	6,8,10	56mm	12mm	26.25mm	40.20mm	470	5	2350
15EDGM-THR-3.5-REEL(72)	12	72mm	16mm	34.25mm	52.90mm	380	3	1140

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				
5				
6				
7				
8				

0	>3	7.6	>10	>18	>30	>50	>70	>100	>150	>200	>250	>315	>400	>500	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
10	12	14	16	18	20	25	30	35	40	45	50	56	63	71	~

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	Sn Plated
1	Housing	Thermoplastic	UL94V-0

UL 标准/UL Standard: B C D  
 额定电压/电流/Rated Voltage(V)/Current(A) 300/8  
 额定脉冲电压(KV)/Role Impulse Voltage (KV) 2.5  
 间距/Pitch(mm)/线数范围/Poles 3.50/N=02~12P  
 使用温度范围/Operating Temperature(C) -40~+130  
 符合RoHS环保要求/Conform to RoHS Yes

NINGBO DEGSON ELECTRICAL CO., LTD  
 宁波德松电子有限公司  
 NAME: 15EDGRC-THR-3.5-XXP-1Y-00A(H)  
 DRAWING NO.: 15EDGRC-THR-3.5-C02  
 SCALE: 1:1 SHEET 1/1