


公差等级/General	Tolerances(mm)													公差等级/General
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.250	>.315	>.400	>.500	0.1/10
3	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
6	10	18	30	50	80	120	180	250	315	400	500	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

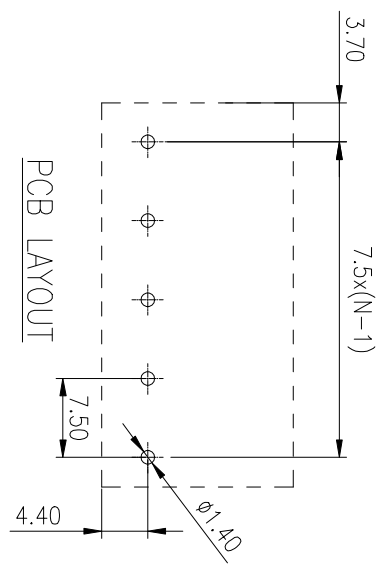

Bending the pin-header after assembling

ITEM	NAME OF PART	MATERIAL	NOTES
6	Right housing	PA66	UL94V-0
5	Clamp	Copper alloy	Sn plated
4	Left housing	PA66	UL94V-0
3	Housing2	PA66	UL94V-0
2	Side housing	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:	/		
IEC 标准 / IEC Standard:	/		
污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/
额定电涌电压 / Rate Impulse Voltage(KV)	4.0	/	/
线径范围(裸线或镀线) / Wire Range(rigid and flexible)(mm² / AWG)	/		
间距 / Pitch(mm) / 线径范围 / Poles	7.5 / N=02~12P		
剥线长度 / Stripping length(mm)	6~7		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE 428C		
PANTONE / RAL	PANTONE 428C		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

8EDGAM-7.5-XXP-11-01A(H)

DRAWING NO.: 8EDGAM-7.5-C02

DRAFT: WangY1 2020.06.17

TYPE: CUSTOMER DRAWING

SCALE: 2:1

REV T0

1/1

REV ECN DESCRIPTION DRAFT DATE SIZE: A4