

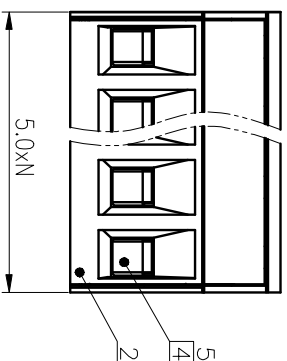
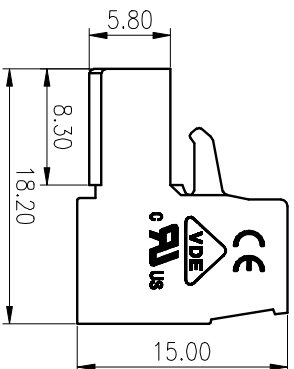


公差等级/General tolerances(mm)		公差等级/General tolerances(mm)										公差等级/General tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±Z

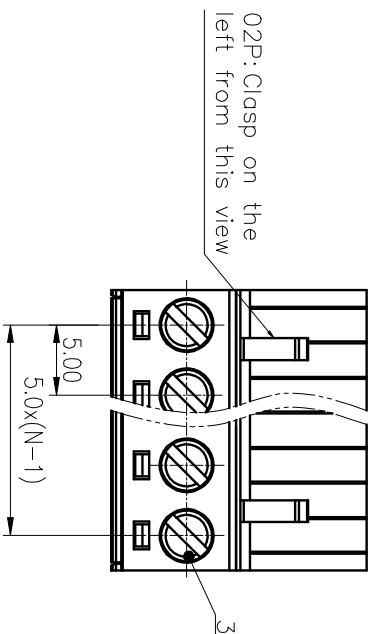

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DRAWING NO.: 10001602	
APPD: Lon	CHH2020.03.24	NAME: ZEDGK-5.0-XXP-1Y-1000(H)	
CHKD: Gong	YZ2020.03.24	DRT: Fqn JY 2020.03.24	
DRT: Fqn	JY 2020.03.24	TYPE: CUSTOMER DRAWING	
REV	ECN	DESCRIPTION	DRAFT
1	2	3	4
5	6	SCALE: 2:1	
			SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Screw	Steel	M3/7n plated
4	Cage	Copper alloy	M3/Ni plated
5	Clamp	Copper alloy	Sn plated

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:	/		
IEC 类别 / IEC Category:	III/2		
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/2		
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20		
额定冲击电压 / Rate Impulse Voltage(KV)	4.0		
额定扭矩 / Torque Tightening(N·m/Lb·in)	M3 0.5/4.43		
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/28~12		
间距 / Pitch(mm) / 线径范围 / Poles	5.0 / N=02~XXP		
剥线长度 / Stripping length(mm)	7~8		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	/		
PANTONE / RAL	/		