


规格/公差 (General Tolerances)(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
±Z	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±Z	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

PCB LAYOUT

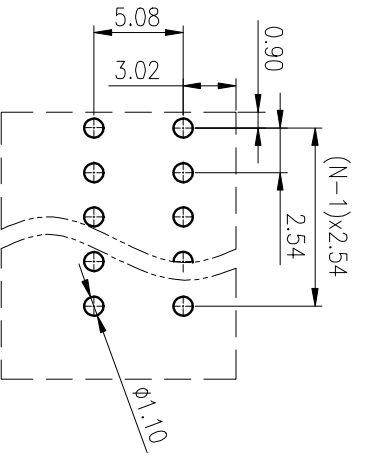

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Button	PA66	UL94V-0
4	Pin Header	Copper alloy	Sn Plated
5	Spring	Stainless steel	

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL 2020.05.18	NAME:	DG141R-2.54-XXP-1Y-00A(H)
CHKD:	Mek 2020.05.18	DRAWING NO.:	DG141R-2.54-C04
DRAFT:	MSh 2020.05.18	TYPE:	CUSTOMER DRAWING
SIZE:	A4	SCALE:	2.5:1 SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	150/2	150/2	150/2
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	/	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	130/6	/
工频耐压/Withstanding Voltage (V/Min)		AC1250	
线径范围(裸线/带绝缘)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~1.0/24~20	
间距/Pitch(mm)/线径范围/Poles		2.54/N=02~24P	
剥线长度/Stripping length(mm)		11	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:		/	
PANTONE / RAL		/	

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司