
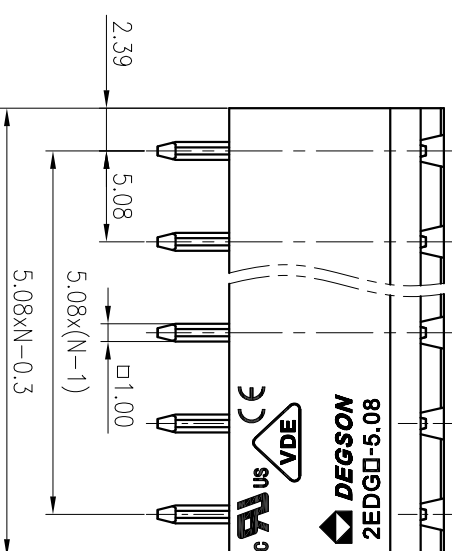
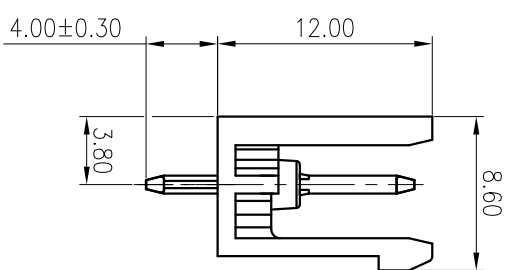
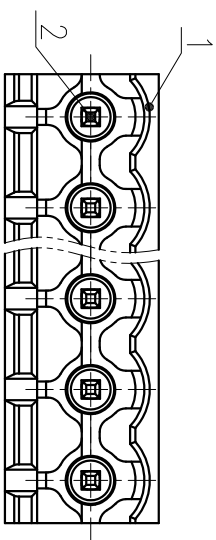


PCB LAYOUT
5.08x(N-1)

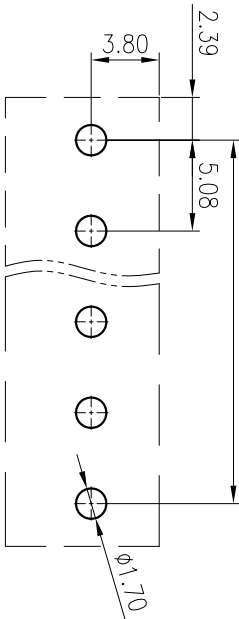

公差/General Tolerances(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>600
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±2	±2.50
0.1/1.0	±2

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	Sn Plated
1	Housing	PBT	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级			
级/ Pollution Degree	III/3	III/2	II/2
额定冲击电压(KV)/Rate Impulse Voltage(KV)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
间距/Pitch(mm)/线数范围/ Poles	5.08/N=02~24P		
使用温度范围/Operating Temperature(°C)	-30~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: SURFACE: 符合RoHS环保要求/Conform to RoHS Yes

MAT NO.: /
STATUS: /
APPD: Lan CHH 2020.05.21
CHKD:
DRAFT: XuLM 2016.10.21

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.: 10002347
TYPE: CUSTOMER DRAWING
SCALE: 2.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

REV	ECN	DESCRIPTION	DRAFT	DATE
1				