



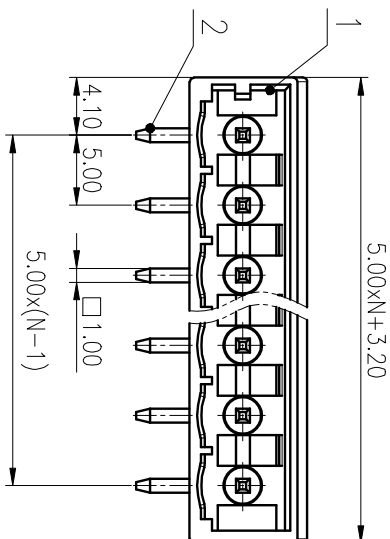
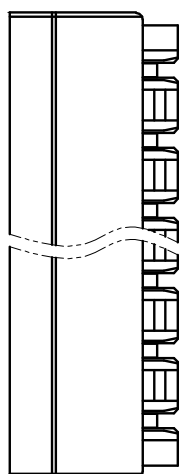


PCB LAYOUT

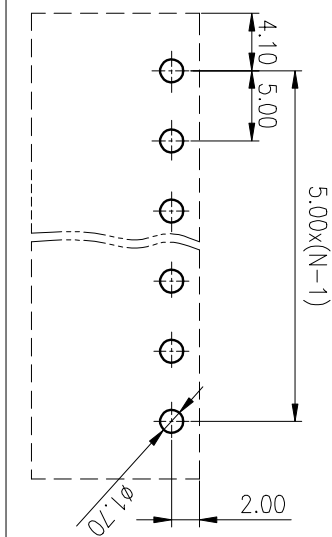

精度等级/General Tolerances(mm)	
0	>3
~	>6
3	>10
6	>18
10	>30
±0.12	±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50
±Z	0.1/10

2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UI	标准 /UL Standard:	B	C
	额定电压/电涌 /Rated Voltage(V)/Current(A)	300/75	300/70
	IEC 标准 /IEC Standard:		
	过压类别 /Overvoltage Category /污染等级 /Pollution Degree		III /3
	额定电压/电涌 /Rated Voltage(V)/Current(A)		320 /20
	额定脉冲电压 (KV) /Rate Impulse Voltage(KV)		4
	额定扭矩 /Torque Tightening(N·m/Lb.in)		/
	线径范围 (裸线/绞线) /Wire Range(rigid and flexible)(mm ² /AWG)		/
	间距 /Pitch(mm) /线数范围 /Poles		5.0 /N=02~24P
	剥线长度 /Stripping length(mm)		/
	使用温度范围 /Operating Temperature(°C)		-40~+105
	符合 RoHS 要求 /Conform to RoHS		Yes
	标准颜色编号 /Standard color number:		
	PANTONE /RAL		PANTONE 7534U

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	
DRAWING NO.:	8EDGRC-5.0-XXP-11-01A(H)
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
REV	T1
SHEET	1/1

NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

REV	ECN	DESCRIPTION	DRAFT	DATE
(1)		Change the frame	CenSL	2020.03.18