

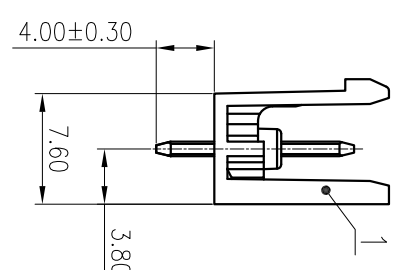
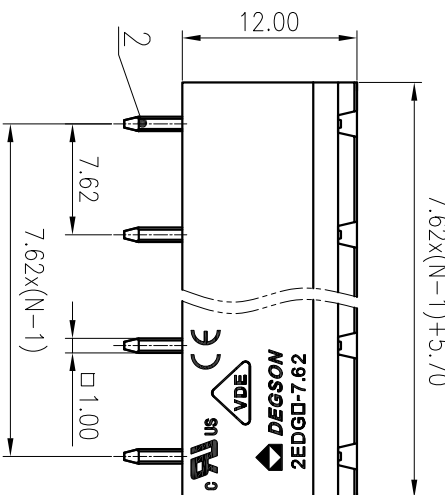


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1.0
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	0	0.1/1.0
±0.1	±0.1	±0.2	±0.2	±0.3	±0.3	±0.5	±0.8	±0.9	±1.0	±1.1	±1.1	±1.6	±2.2	±2.5
2	8	2	6	1	7	7	0	3	5	5	0	0	0	±Z

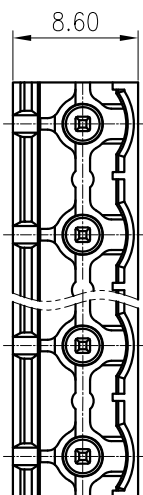

文管中心  
 研发专用  
 2020.05.25  
 (仅限内部使用, 对外无效)

PCB LAYOUT

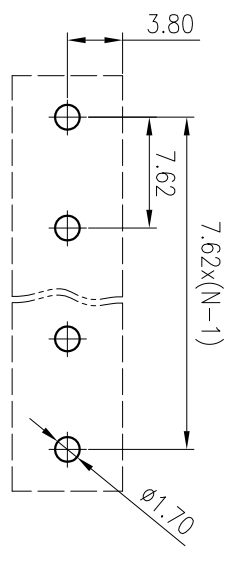

2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/Rated Voltage(V)/Current(A) 300/15 / 300/10			
EC 标准/IEC Standard: / /			
过压类别/Overvoltage Category/污染等级 III/2			
额定电压/电流/Rated Voltage(V)/Current(A) 320/20			
额定冲击电压/Rate Impulse Voltage (KV) 4			
间距/Pitch(mm)/线数/范围/Poles 7.62/02~12P			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL: /  
 MAT NO.: /  
 STATUS: /  
 APPD: LonChH2020.05.26  
 CHKD: GongYZ2020.05.26  
 DRT: ZhuYP 2020.05.25  
 DRAWING NO.: 10002139  
 TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET 1/1

宁波高松电子有限公司  
 NINGBO DEGSON ELECTRICAL CO., LTD  
**2EDGV-7.62-XXP-1Y-100A(H)**

REV	EON	DESCRIPTION	DRT	DATE
1				
2				
3				
4				
5				
6				