

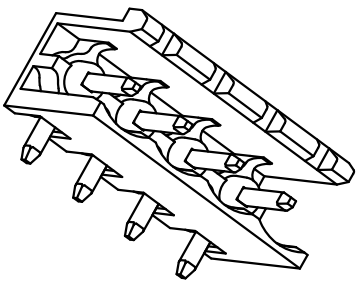
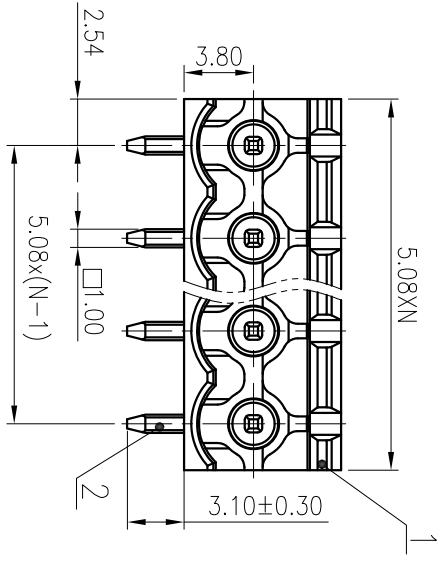
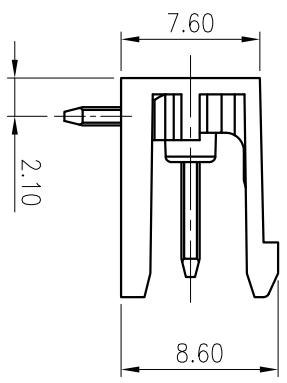


公差表/General Tolerances(mm)	
0	~
>3	~
3	~
6	~
10	~
18	~
30	~
50	~
80	~
120	~
180	~
250	~
315	~
400	~
500	~
>500	~
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	±Z

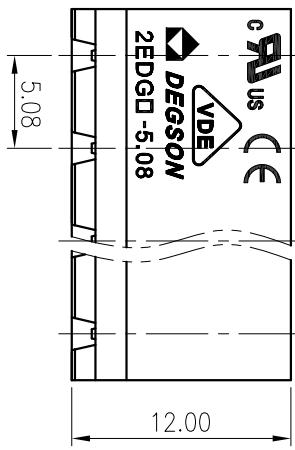

PCB LAYOUT

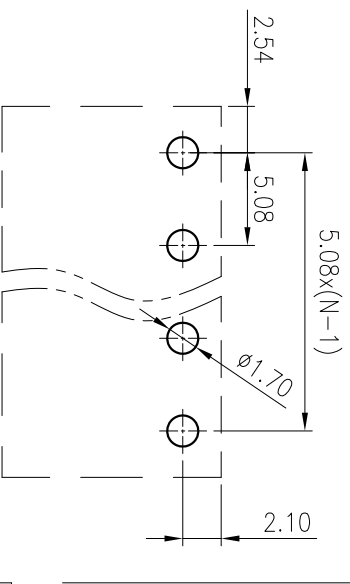

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Pin	Copper	Sn Plated

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	300/15	300/10	300/10
额定电流/Rated Current(A)	300/15	300/10	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	4
间距/Pitch(mm)/线数范围/Poles	5.08	N=02~24P	
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: 2EDGR-5.08-XXP-1Y-100A(H)

REV	ECN	DESCRIPTION	DRFT	DATE
1				
2				
3				
4				
5				
6				

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	LonCHH 2020.05.13
CHKD:	GongYZh 2020.05.13
DRFT:	LY 2020.05.13
DRAWING NO.:	10001949
TYPE:	CUSTOMER DRAWING
SCALE:	2.5:1
SHEET	1/1
REV	T0