
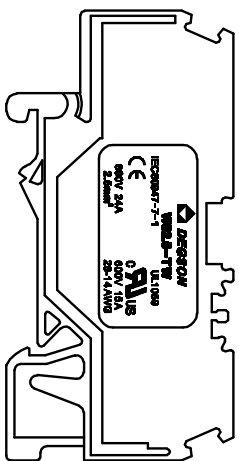

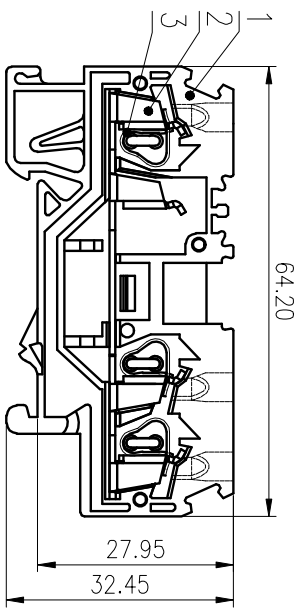


精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

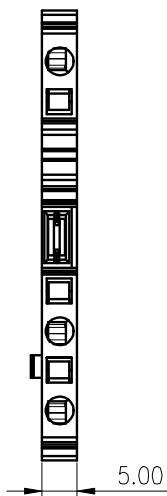

ITEM	NAME OF PART	MATERIAL	NOTES
3	Spring	Stainless steel	
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:		B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)		600/15	600/15	600/5
IEC 标准 /IEC Standard:				
过压类别 /Overvoltage Category /污染等级		III / 3	/	/
绝缘 /Pollution Degree				
额定电压/电涌 /Rated Voltage(V)/Current(A)		800/24	/	/
额定脉冲电压 (KV) /Rate Impulse Voltage(KV)		8.0	/	/
线径范围 (硬线/软线) /Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)		0.2~2.5 /28~14(So)		
厚度 /Pitch(mm)		5.00		
剥线长度 /Stripping length(mm)		9		
使用温度范围 /Operating Temperature(°C)		-40~+105		
符合RoHS环保要求 /Conform to RoHS		Yes		
标准颜色编号 /Standard color number:		/		
PANTONE / RAL		/		

MATERIAL: SURFACE:

MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	LIGL 2020.05.27	NAME: WS2.5-TW-01P-1Y-00A(H)	
CHKD:	McoJ 2020.05.27	DRAWING NO.: WS2.5-TW-C01	
DRT:ZhengQG 2020.05.27		TYPE: CUSTOMER DRAWING	
REV	ECN	DESCRIPTION	DATE
1	2	3	4
SIZE: A4	SCALE: 1:1	SHEET	1/1

1 2 3 4 5 6

1 2 3 4 5 6