
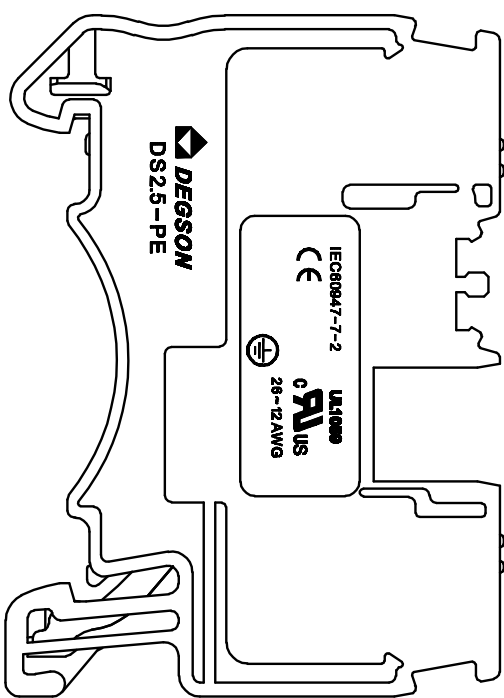


公差/General Tolerances(mm)	
0	>3
~	>5
3	~ 10
6	~ 18
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
0.1/10	0.1/10
±Z	±Z

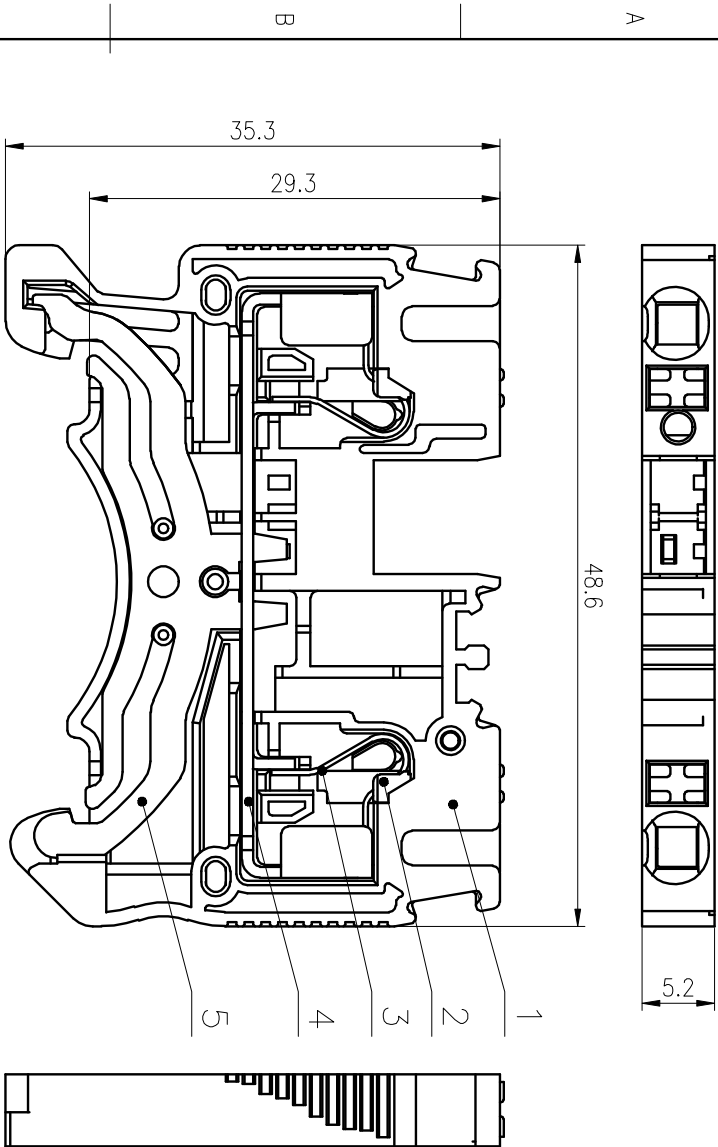

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Button	PA66-GF	UL94V-0
3	Spring	Stainless steel	
4	Current carrier	Copper	Sn Plated
5	Grounding	Copper alloy	Sn Plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: Li GL 2020.04.02	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Moo J 2020.04.02	DS2.5-PE-01P-1C-00A(H)
DRAFT:Wang LX 2020.04.02	DRAWING NO.: DS2.5-PE-C01
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 2:1	SCALE: 2:1
	SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污秽等	III/3	/	/
绝缘/Pollution Degree	/	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~2.5&4(SOL)/26~12	/	/
厚度/Pitch(mm)	5.2	/	/
剥线长度/Stripping length(mm)	10~12	/	/
使用温度范围/Operating Temperature(°C)	-40~+105	/	/
符合RoHS要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/