
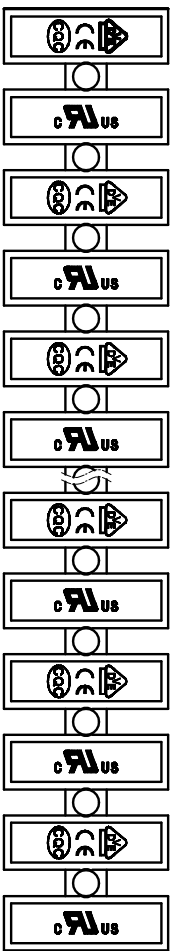

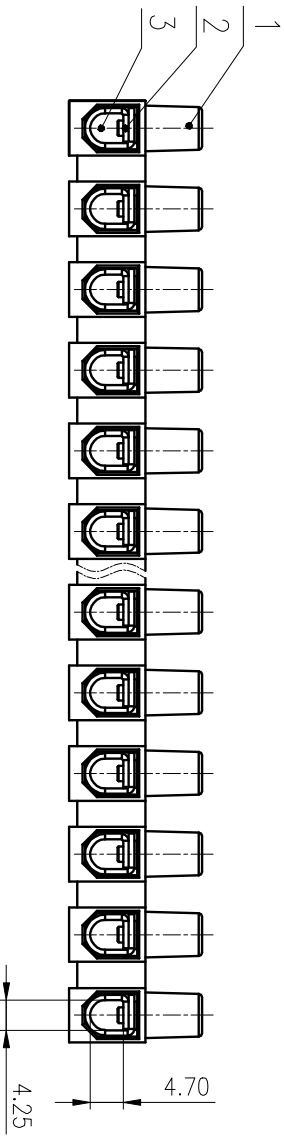


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	±Z

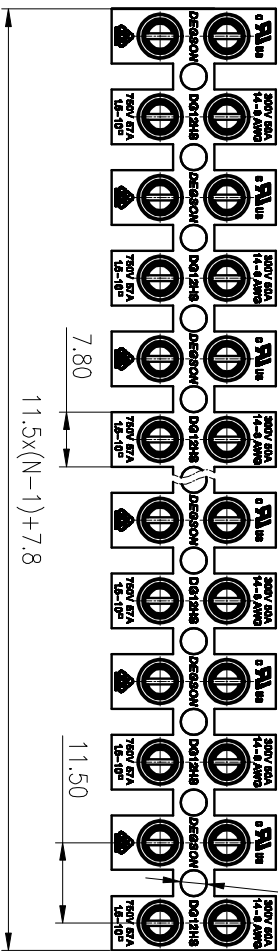

3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/501150/501300/710		
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	750/57	/
额定冲击电压(kV)/Rate Impulse Voltage(kV)	/	3.0	/
拧紧扭矩/螺栓和垫圈/Torque Tightening(N·m/Lb·in)	M3.5, 0.8/7.02		
柔性范围/导线和垫圈/Wire Range(rigid and flexible)(mm ² /AWG)	1.5~10/14~8		
间距/Pitch(mm)/线数范围/Poles	11.5		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL: /			
SURFACE: /			
MAT NO.: /			
STATUS: /			
APPD: /			
CHKD: /			
DRAWING NO.: DG12HS-1.2-XXP-1Y-100A(H)			
DRAFT: WangY1 2020.05.21			
TYPE: CUSTOMER DRAWING			
SCALE: 1:1			
SHEET 1/1			

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG12HS-1.2-XXP-1Y-100A(H)

DRAWING NO.: DG12HS-1.2-C02

DRAFT: WangY1 2020.05.21

DESCRIPTION

ECN

REV

DATE

DRAFT

SIZE: A4

mm

inch

TYPE: CUSTOMER DRAWING

SCALE: 1:1

SHEET

1/1

REV

TO

1/1

1

2

3

4

5

6

1

2

3

4

5

6