
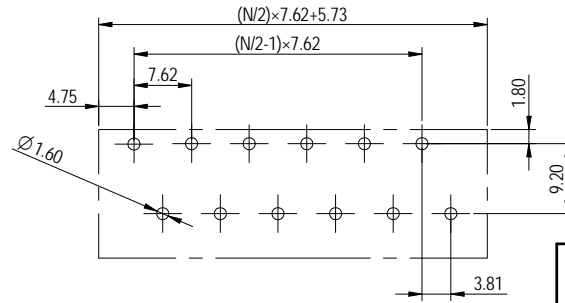
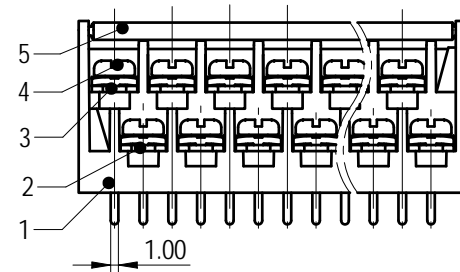

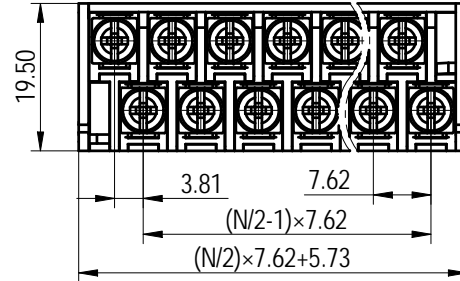


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除专利等权利明确标注外, 否则禁止非法、复制或/或用。 未经授权, 严禁复制或传播本文件内容。 保留所有权利及发明权。 未经许可, 严禁复制或传播本文件内容。 保留所有权利。

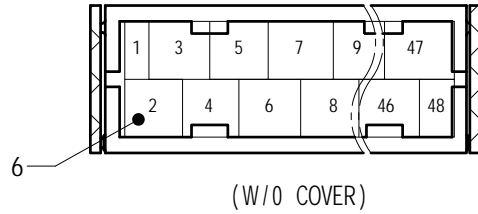

PCB LAYOUT

未注公差/General tolerances (mm)													0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
6	Label	Paper	/
5	Cover	PC	UL94V-2
4	Screw	Steel	Ni Plated
3	Pin header2	Copper alloy	Sn Plated
2	Pin header1	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	22~14		
间距/Pitch(mm)/线数范围/Poles	7.62/N=6,8,10,12,14,16,18,20,22,24,26,28,30,32,36,40,44,48P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL:	SURFACE/COLOR:		
MAT NO./REV: / 00		MAT STATUS: 批量			
APPD: 蓝贵凡 2022.12.09	NAME				
CHKD: 曹利彬 2022.12.09	DG24-1-B-XXP-1Y-00A&Z(H)				
DRFT: 孙科豪 2022.12.09	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
④ ⑤ A4 (inch)	200120922	CUSTOMER DRAWING	已发布	1:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				