
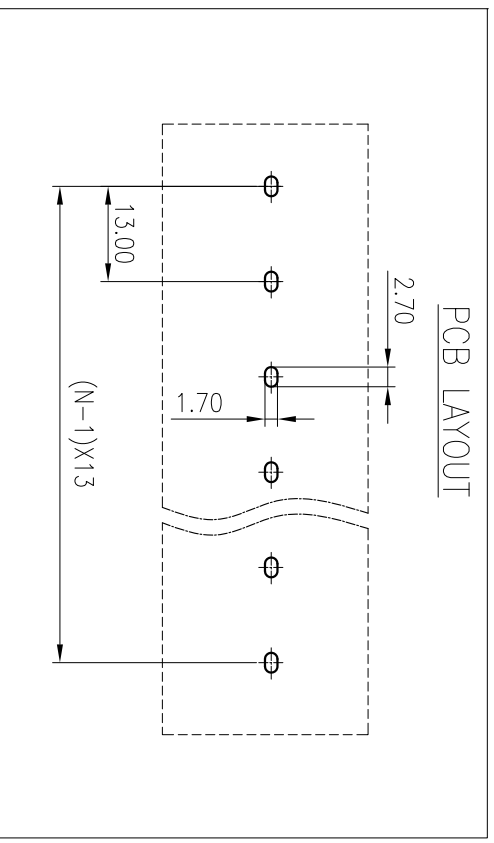


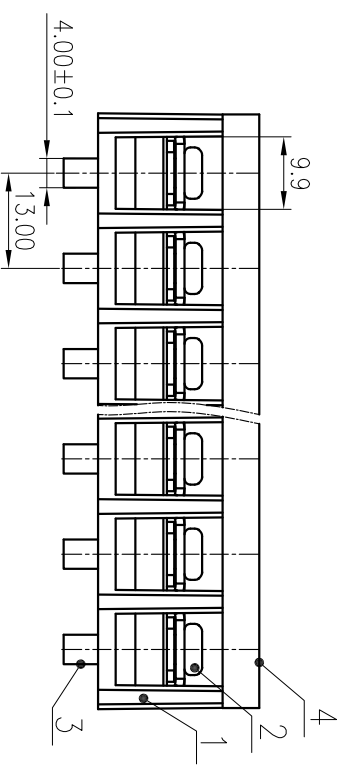


公差/General Tolerances(mm)	
0	>3
~ 3	~ 6
~ 6	~ 10
~ 10	~ 18
~ 18	~ 30
~ 30	~ 50
~ 50	~ 80
~ 80	~ 120
~ 120	~ 180
~ 180	~ 250
~ 250	~ 315
~ 315	~ 400
~ 400	~ 500
~ 500	>500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	±Z

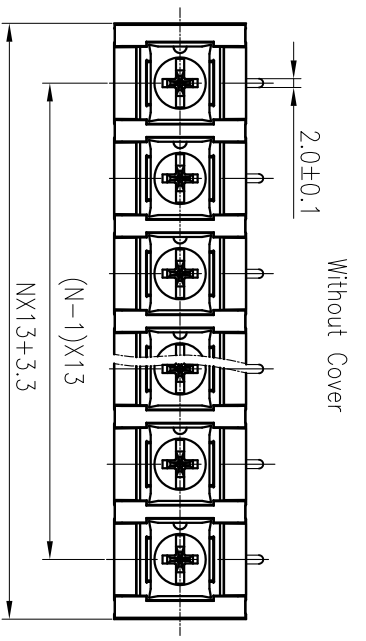

4	Cover	PC	UL94V-2
3	Pin header	Copper alloy	M4/Sn plated
2	Screw	Steel	M4/Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 600/40 600/40 600/5			
IEC 标准/IEC Standard: 过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
级/ Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A) 1000/41 1000/41 1000/41			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) 8 8 8			
额定脉冲电流(KV)/Rate Impulse Current(KV) 8 8 8			
螺丝扭矩/Torque Tightening(N.m/Lb.in) M4, 1.16/10.5			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG) 0.75~6/18~10			
可扭/Pitch(mm)/线数范围/Poles 13/N=02~20P			
剥线长度/Stripping length(mm) 9~10			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: XieXD 2020.06.15

NAME: DG78R-B-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE

DRAWING NO.:	DG78R-C02	SCALE:	1:1
TYPE:	CUSTOMER DRAWING	SHEET	1/1
REV	TO	REV	TO

1 2 3 4 5 6

D C B A