

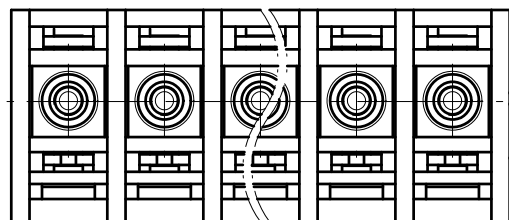
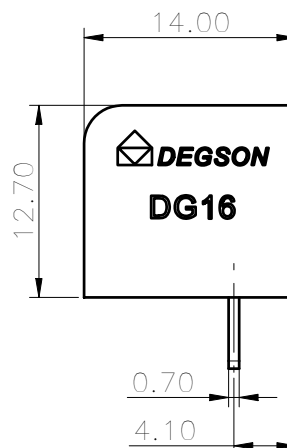
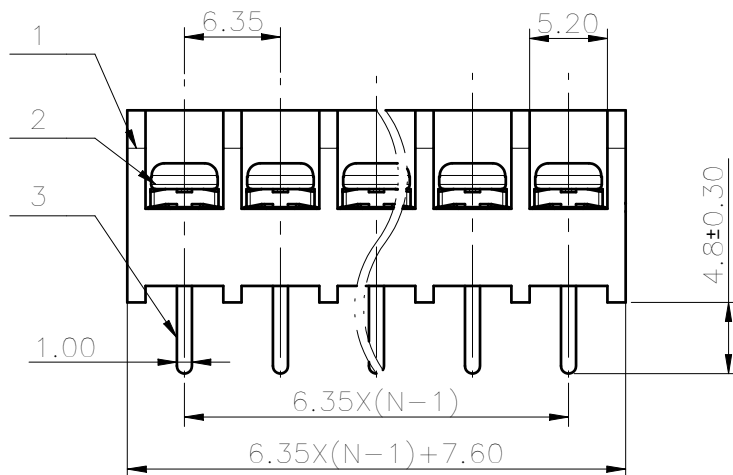


未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



PCB LAYOUT

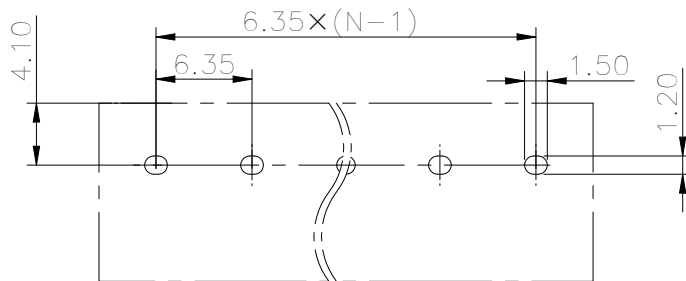

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	Pin header	Copper alloy	Sn Plated
2	Screw	Steel	Ni plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	300/10
工频电压(Withstand Voltage)	AC2000V/1Min		
绝缘电阻(Insulation Resistance)	500MQ/DC500V		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm <sup>2</sup> )	22~16 / 0.34~1.5		
间距/Pitch(mm)/线数范围/Poles	6.35/N-02~24P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

<b>DEGSON</b>		MATERIAL:	SURFACE/COLOR:	
APPD: 蓝贵凡 2023.01.05		MAT NO./REV:	/ 00	
CHKD: 曹利彬 2023.01.05		NAME		
DRFT: 孙科豪 2023.01.05		DG16S-B-XXP-1Y-00A&Z(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200048807	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 否则禁止转让、复制、利用、交加本文件的内容, 一经发现将追究法律责任, 侵权者将承担一切法律责任。 本公司保留对本文件的所有权利。