




The first pin will bulge to the left

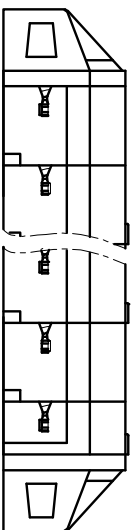

公差等级/General	Tolerances(mm)										0.1/1.0		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
3	~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~3
6	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50
10	±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.50	±0.60	±0.70	±0.80	±1.00	±1.50	±2.00

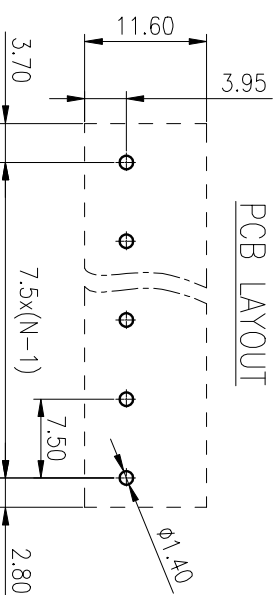

Bending the pin-header after assembling

ITEM	NAME OF PART	MATERIAL	NOTES
6	Right housing	PA66	UL94V-0
5	Clamp	Copper alloy	Sn plated
4	Left housing	PA66	UL94V-0
3	Housing2	PA66	UL94V-0
2	Side housing	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/70
IEC 标准 / IEC Standard:	/		
IEC 标准 / IEC Standard:	/		
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/
额定电涌电压 / Rate Impulse Voltage(KV)	4.0	/	/
线径范围(硬线和软线) / Wire Range(rigid and flexible)(mm² / AWG)	/		
间距 / Pitch(mm) / 线数范围 / Poles	7.5 / N=02~12P		
剥线长度 / Stripping length(mm)	6~7		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE 428C		
PANTONE / RAL	PANTONE 428C		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRT: WongY1 2020.06.19

DRAWING NO.: 8EDGBM-7.5-C02

TYPE: CUSTOMER DRAWING

SCALE: 2:1

REV 1/1

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
宁波高松电子有限公司

8EDGBM-7.5-XXP-11-01A(H)

REV ECN DESCRIPTION DRAFT DATE SIZE: A4