
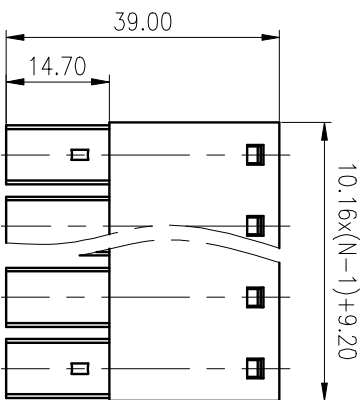


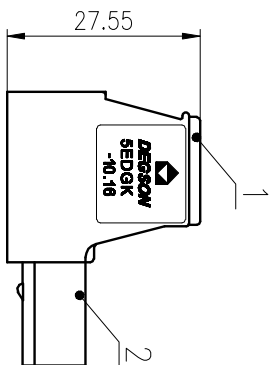



精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										形位公差/Geometric Tolerances		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z



ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Cage	Copper alloy	M4/Ni Plated
4	Screw	Copper	M4/Ni Plated
5	Clamp	Copper	Ag Plated
6	Spring	Stainless steel	

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

MATERIAL:		SURFACE:	
MAT NO.:	/		
STATUS:	/		
APPD:	LI GL 2020.06.18	NAME:	
CHKD:	MCO J 2020.06.18	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	
DRAFT:	Feng X 2020.06.17	DRAWING NO.: SEDGK-10.16-C01	
SIZE:	A4	TYPE:	CUSTOMER DRAWING
SCALE:	1:1	SCALE:	1:1
		REV	T7
		SHEET	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/52	600/52	300/710
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3		
额定电压/电涌/Rated Voltage(V)/Current(A)	600/57	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6.0	/	/
拧紧扭矩/Torque Tightening(N·m/Lb.in)	M4: 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.5~10/20~6		
间距/Pitch(mm)/线数范围/Poles	10.16/N=N=02~08P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

SEDGK-10.16-XXP-1Y-00A(H)