
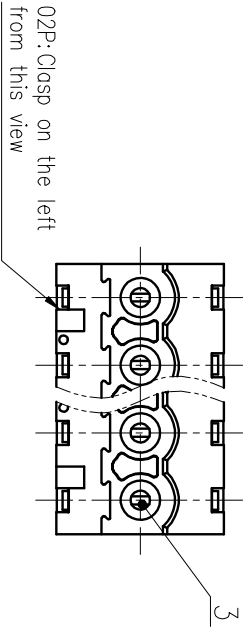
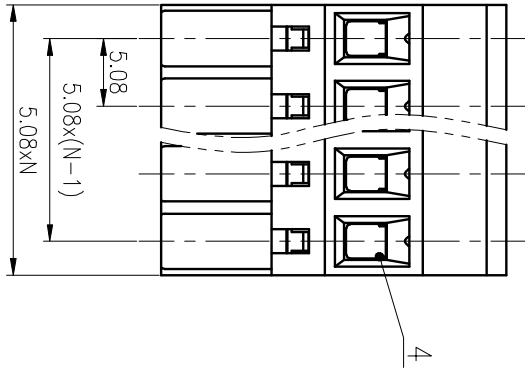
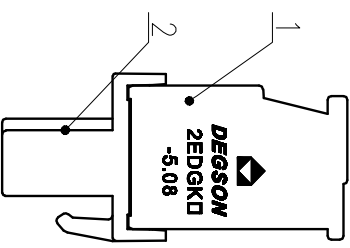
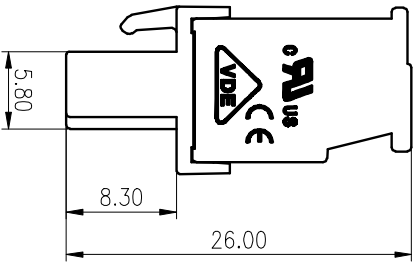


公差等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12/±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2

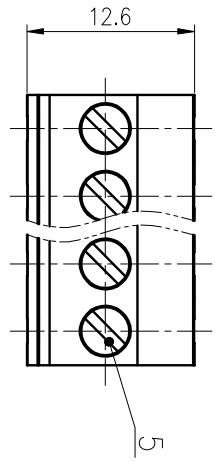

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
5	Screw	Steel	M3/Zn Plated

UL 标准/UL Standard: B C D

额定电压/电压/Rated Voltage(V)/Current(A) 300/15 / 300/10

IEC 标准/IEC Standard: III/3 III/2 II/2

过压类别/Overvoltage Category/污染等 III/3 III/2 II/2

额定电压/电压/Rated Voltage(V)/Current(A) / 320/18 /

额定冲击电压(KV)/Rote Impulse Voltage(KV) / 4 /

额定转矩/Torque Tightening(N·m/Lbin) M3: 0.66/6.0

导线范围(导线规格)/Wire Range(rigid and flexible)(mm²/AWG) 1.0~2.5/28~12

间距/Pitch(mm)/螺距范围/Poles 5.08/N=02~24P

剥线长度/Stripping length(mm) 7

工作温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波德松电子有限公司

NAME: 2EDGKB-5.08-XXP-1Y-1000A(H)

MAT NO.:	APPD: Lon CHH 2020.05.25	NAME:	DRAWING NO.:	10002037	REV	TO
STATUS:	CHKD:Gong YZh 2020.05.25	DFT: YIn DK 2020.05.25	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET	1/1

REV	ECN	DESCRIPTION	DFT	DATE	SCALE	SHEET
1					2:1	1/1