


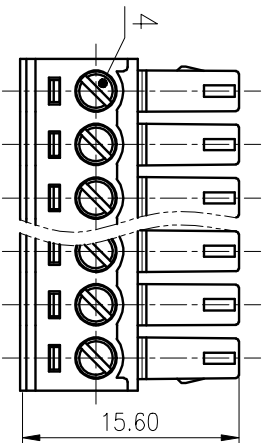



规格/General		Tolerances(mm)										公差														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0													
3	6	10	18	30	50	80	120	180	250	315	400	>500														
±0.12		±0.18		±0.22		±0.26		±0.31		±0.37		±0.57		±0.80		±1.05		±1.15		±1.60		±2.20		±2.50		±Z

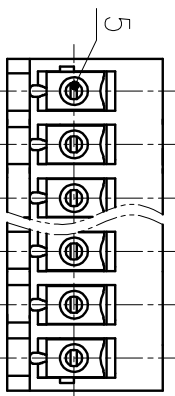

Only 02-06 Poles  
have this stick point

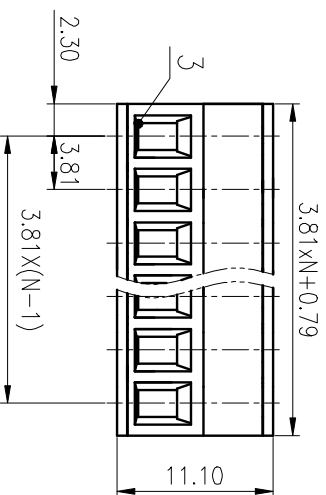

5	Clamp	Copper Alloy	Sn Plated
4	Screw	Steel	M2/Zn Plated
3	Cage	Copper Alloy	M2/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B 300/8 C / D 300/8			
额定电压/电涌/Rated Voltage(V)/Current(A)			
IEC 标准/IEC Standard: B 300/8 C / D 300/8			
过压类别/Overvoltage Category/污染等级			
II/2			
污染度/Pollution Degree			
250/7			
额定电压/电涌/Rated Voltage(V)/Current(A)			
250/7			
额定脉冲电压(kV)/Rate Impulse Voltage(kV)			
2.5			
额定扭矩/紧固力矩/Torque Tightening(N·m/Lb·in)			
M2, 0.2/1.77			
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)			
0.5~1.5/28~16			
间距/Pitch(mm)/线数范围/Poles			
3.81/N=02~24P			
剥线长度/Stripping length(mm)			
6~7			
使用温度范围/Operating temperature(°C)			
-40~+105			
符合RoHS要求/Conform to RoHS			
Yes			

MATERIAL: /

SURFACE: /

MAT NO.: /

DEGSON<sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD

STATUS: /

APPD: LanChH 2020.05.30

NAME: 15EDGK-3.81-XXP-1Y-00A(H)

CHKD: YUZH 2020.05.30

DRAWING NO.: 10002217

DRT: BGYH 2020.05.30

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				

SIZE: A4

SCALE: 2:1

REV T0

1/1 SHEET

D

C

B

A

D

C

B

A