


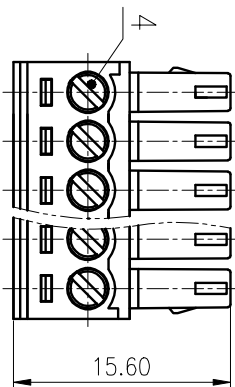



公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)											
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/0
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±Z
±0.12		±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50



Only 02-06 Poles
have this stick point

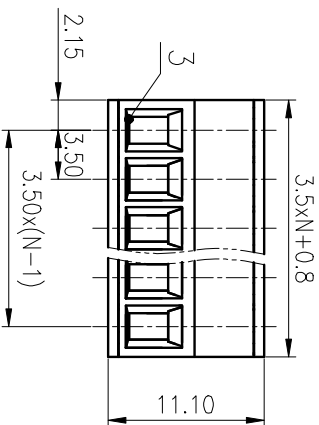

REV	ECN	DESCRIPTION	DRAFT	DATE
1	2	3	4	5
6	1/1	CUSTOMER DRAWING		
SCALE: 2:1 SHEET				
MATERIAL: / SURFACE: /				
MATERIAL: /				
MAT NO.: /				
STATUS: /				
APPD: LanChH 2020.05.30				
CHKD: YUZH 2020.05.30				
DRAFT: BotH 2020.05.30				
NAME: 15EDGK-3.5-XXP-1Y-00A(H)				
DRAWING NO.: 10002218				
TYPE: CUSTOMER DRAWING				
SCALE: 2:1 SHEET				
REV T0				

5	Clamp	Copper Alloy	Sn Plated
4	Screw	Steel	M2/Zn Plated
3	Cage	Copper Alloy	M2/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B 300/8 C / D 300/8			
额定电压/电涌/Rated Voltage(V)/Current(A) IEC 标准/IEC Standard: / /			
过压类别/Overvoltage Category/污染等级/Pollution Degree II/2			
额定电压/电涌/Rated Voltage(V)/Current(A) 250/7			
额定冲击电压(kV)/Rate Impulse Voltage(kV) 2.5			
紧固扭矩/ Torque Tightening(N·m/Lbin) M2, 0.2/1.77			
扭应力范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG) 0.5~1.5/28~16			
间距/Pitch(mm)/线数范围/Poles 3.50/N=02~24P			
剥线长度/Stripping length(mm) 6~7			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS要求/Conform to RoHS Yes			

DEGSON
NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司