


精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

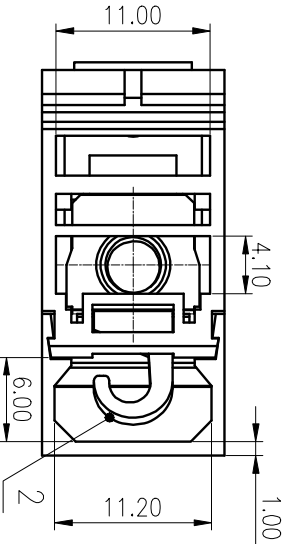

3	Screw	Steel	M4/Ni Plated
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		600/30	600/50
EC 标准/IEC Standard:		600/30	600/50
IEC 标准/IEC Standard:		600/30	600/50
过压类别/Overvoltage Category/污秽等级/Pollution Degree		III/2	
额定电压/电压/Rated Voltage(V)/Current(A)		450/32	
工频耐压/Withstanding voltage		AC3000V/1Min	
拧紧扭矩/Torque Tightening(N·m/Lb.in)		M4: 1.2/10.62	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.5~4/20~12	
剥线长度/Stripping length(mm)		9	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number: RAL		RAL 2000	

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRT: CenWZ 2020.05.18

SIZE: A4

TYPE: CUSTOMER DRAWING

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

TSB4-01P-15-01A(H)

DRAWING NO.: TSB4-C01

SCALE: 2:1

SHEET 1/1

D

C

B

A

D

C

B

A

1

2

3

4

5

6

2

3

4

5

6