



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
00-2		Drawings to upgrade	LLL	2020.07.07

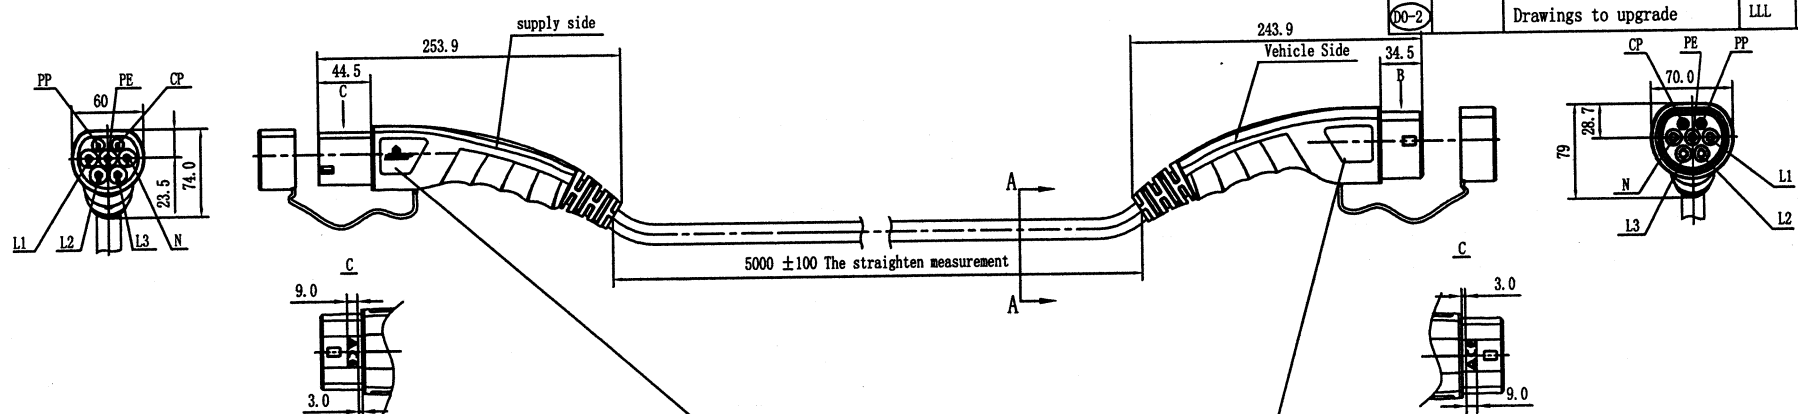


Wiring diagram

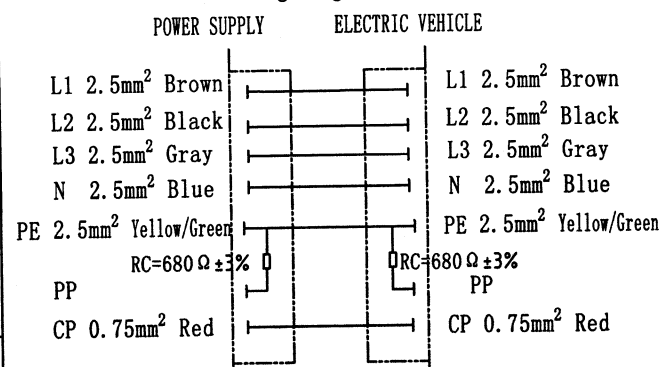

Laser Printing Front Note:

 Laser Printing Back Note(Arial) :
 MEAC-T-016A-P1-03-5.0M-30AH
 16A 440V AC
 IEC 62196-2:2016
 IP54
 20xxxxxx-xxxx

Laser Printing Front Note(Arial) :
 MEAC-T-016A-V1-03-5.0M-30AH
 16A 440V AC
 IEC 62196-2:2016
 IP54
 20xxxxxx-xxxx
 Laser Printing Back Note:

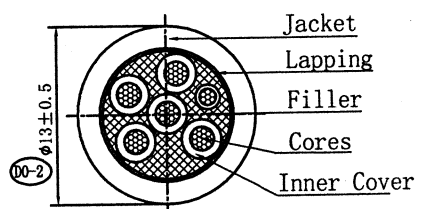

SEC A-A

Technical parameters	
Rated voltage	440V AC
Rated current	16A
Temperature range	-30°C~+50°C
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

NOTES:
 1. Cable: EN50620-2017 EV 5*2.5mm²+1*0.75mm² Black
 2. RoHS Compliance

Customer Drawing

Size Measure Range	. XX	. X	PART NO. :	
≤6	±0.05	±0.10	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD APPD: ZX 2020.7.7 CHKD: DT 2020.7.7 DRFT: XF LUO 2020-01-15 TITLE: Customer Drawing NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (16A three-phase) MEAC-T-016A-VIP1-03-5.0M-30A(H) REV: D0-2 SHEET: 1/1 SCALE: 1:6 DO NOT SCALE DRAWING	
6~30	±0.10	±0.20		
30~120	±0.15	±0.30		
120~400	±0.20	±0.50		
400~1000	±0.30	±0.80		
1000~2000	±0.50	±1.20		
Angle Measure Range	. XX	. X	DETACHED LISTS THIRD ANGLE PROJECTION	
	±0.5°	±1.0°		