
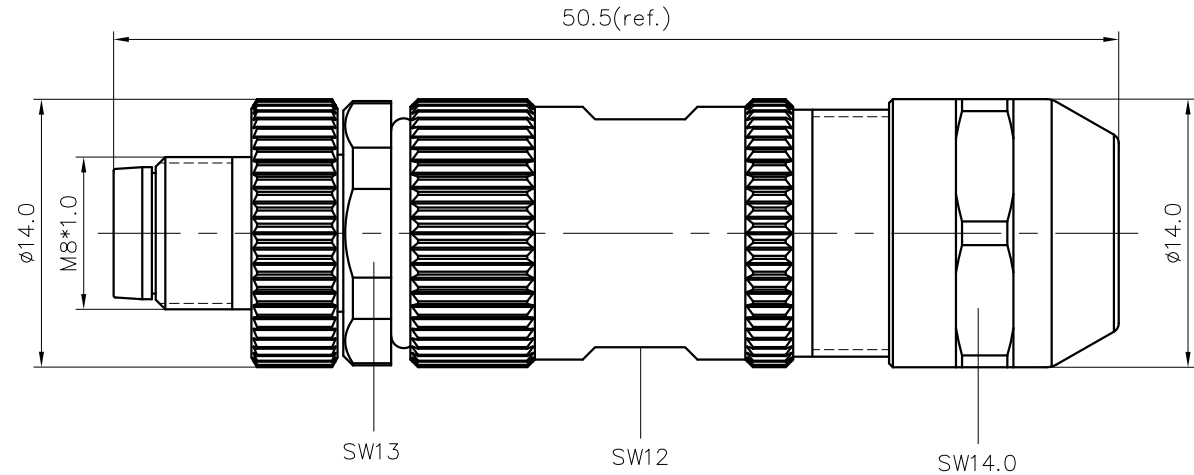


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



NOTES:


- Rated voltage/current : 3pin:60V / 3A  
4pin:60V / 3A  
5pin:30V / 3A  
6pin:30V / 1.5A  
8pin:30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min  
5,6,8pin: AC650V/1Min
- Levels of protection: IP67
- Wire range : 3pin: 24~22AWG/0.25~0.34mm<sup>2</sup>  
4pin: 24~22AWG/0.25~0.34mm<sup>2</sup>  
5pin: 24~22AWG/0.25~0.34mm<sup>2</sup>  
6pin: 26~24AWG/0.14~0.25mm<sup>2</sup>  
8pin: 26~24AWG/0.14~0.25mm<sup>2</sup>
- Cable range : 4~6mm
- Wire connection mode: soldering
- Operating temperature: -40°C~+85°C
- RoHS Compliance
- Tolerance : ±0.5mm

PASH-M8X-XXP-MM-SL7001-00A(H)

Coding: A,B


Pin number: 03,04,  
05,06,08

6pin A Coding




Pin Assignment  
Front View

8pin A Coding




Pin Assignment  
Front View

3pin A Coding




Pin Assignment  
Front View

4pin A Coding



Pin Assignment  
Front View

5pin B Coding



Pin Assignment  
Front View

DETACHED LISTS	PART NO.: PASHM8XXXPMMSL700100AH		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: PASH-M8X-XXP-MM-SL7001-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV	D0-1	
		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1