

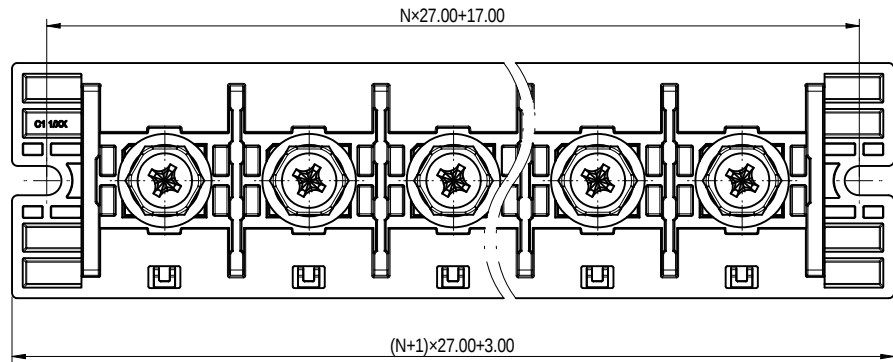
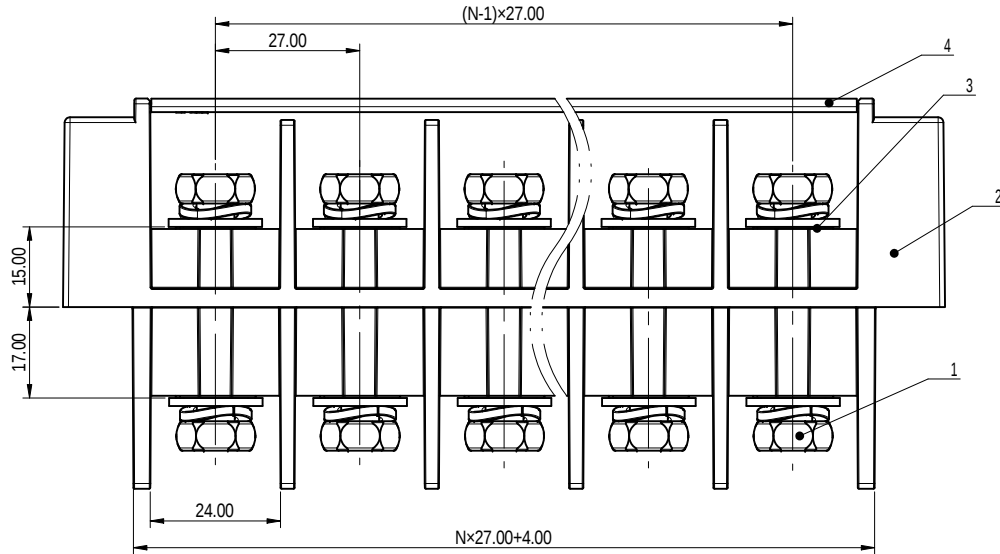
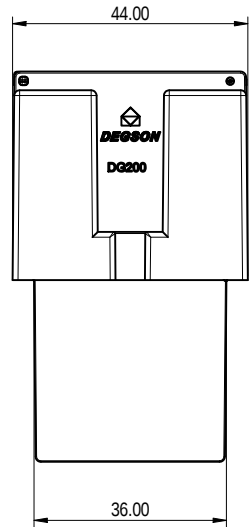



(W/O COVER VIEW)

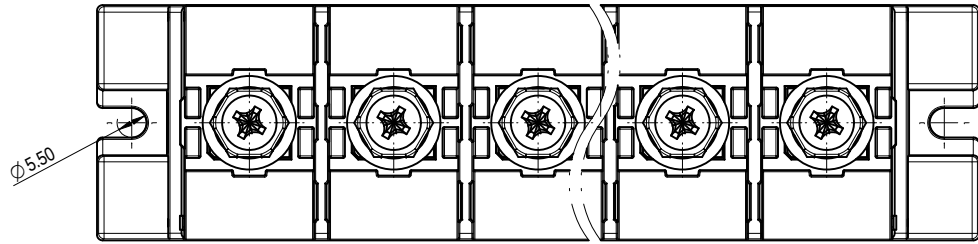

公差/General tolerances (mm)													D 0.1/10 ±2
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



1: 5

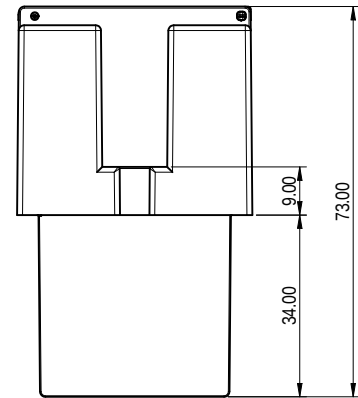

Note: The A&Z (H) in the name means: A (H) and Z (H).

4	Cover	PC	UL94V-2
3	Cage	Copper alloy	Ni Plated
2	Housing	PA66+25%GF	UL94V-0
1	Screw	Steel	Zn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			E
额定电压/电流/Rated Voltage(V)/Current(A)			1000/200
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree			III/3 III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)			1500/200
额定脉冲电压(KV)/Rate Impulse Voltage(KV)			8
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M8 6.0/53.12
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)			6~3/0/10~70
间距/Pitch(mm)/线数范围/Poles			27.00/N=02~05P
使用温度范围/Operating temperature(°C)			-40~+120
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL:		SURFACE/COLOR:	
		MAT NO./REV:		MAT STATUS:	
APPD: 蓝黄凡		2023.03.27		NAME:	
CHKD: 曹利彬		2023.03.27		DG200-A-XXP-1Y-00A&Z(H)	
DFT: 姜民洁		2023.03.27		DRAWING NO.	
				200170081	
				TYPE	
				CUSTOMER DRAWING	
				DRAWING STATUS	
				已发布	
				SCALE	
				1:1	
				SHEET	
				1/1	

00	ECN	DESCRIPTION	DFT	DATE
REV	ECN	DESCRIPTION	DFT	DATE

A3
1:1
(Inch)