

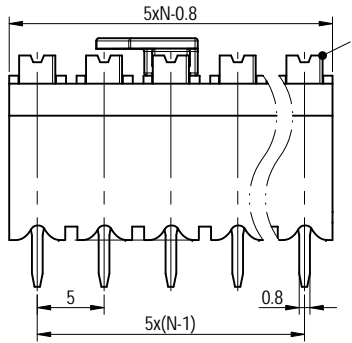

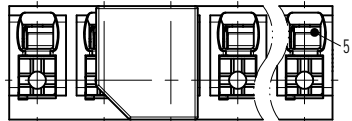

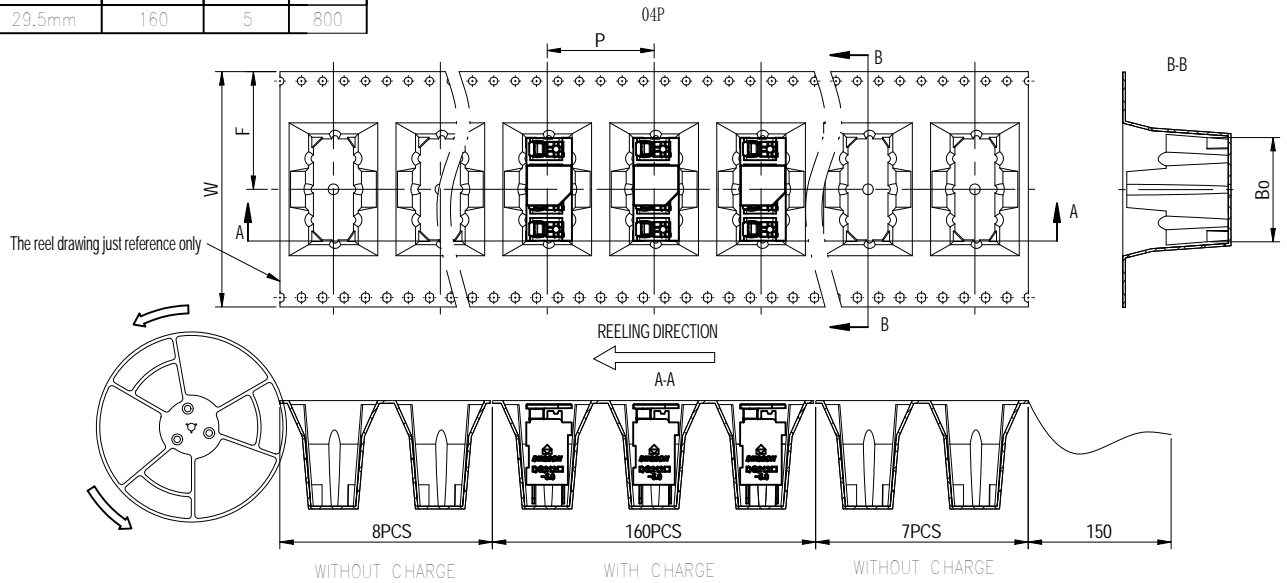



Reel Name	POLE	Width/W	Pitch/P	Width/F	Width/Bo	Qty. pre reel	Reel qty. per carton	Qty. per carton
DG212V-THR-5.0-02P-REEL(32)	02	32mm	20mm	16mm	9.5mm	160	8	1280
DG212V-THR-5.0-04P-REEL(44)	04	44mm	20mm	22mm	19.5mm	160	6	960
DG212V-THR-5.0-05P-REEL(44)	05	44mm	20mm	22mm	24.5mm	160	6	960
DG212V-THR-5.0-06P-REEL(56)	06	56mm	20mm	28mm	29.5mm	160	5	800

公差/General tolerances (mm)													D	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2	±2
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														

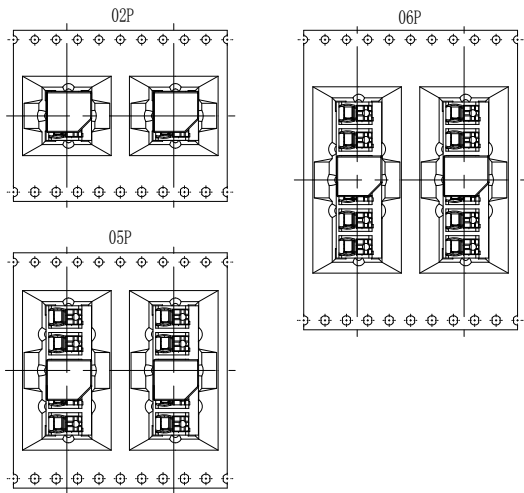

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	/
4	Button	PA66+GF	UL94V-0
3	Acetabulum	LCP+GF	UL94V-0
2	Housing	PA10T+GF	UL94V-0
1	Pin header	Copper Alloy	Sn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/12	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	320/17.5	320/17.5	500/17.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~14 / 0.2~1.5		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		



DEGSON MATERIAL: - SURFACE/COLOR: -
 MAT NO./REV: - /00 MAT STATUS: 批量

NAME: DG212V-THR-5.0-XXP-1Y-1000R(H)

APPD:		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
CHKD:		200022201	CUSTOMER DRAWING	work	2.5:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				2022.11.04
				2022.11.04

Transfer or duplication of this document as well as the utilization of its contents without the written permission of DEGSON is prohibited. 未经授权复制或传播本文件及其内容，或在本文件的基础上进行二次开发，均属于侵权行为，公司将依法追究。 All rights reserved for patent.