


Przegląd

Informacje o produkcie

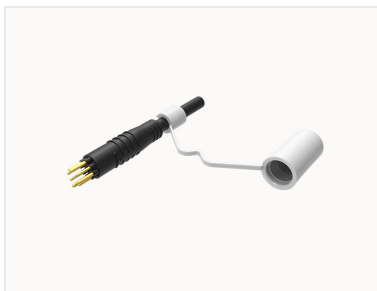

PM-EBM-3006-M-25010000005

Motor harness male connector, rated current 15A; rated voltage 48V DC; withstand voltage 500V AC; insulation resistance > 30MΩ; 40~105°C; salt spray resistance 48h; flame retardant grade UL94-V0; environmental protection RoHS.

Zalety produktu

- ☒ Small structure and high space utilization
- ☒ The male connector has a protective cover for easy protection of the terminals
- ☒ Straight plug operation, convenient and quick
- ☒ Beautiful appearance, more ergonomic design

Certyfikacja produktu

RoHS

Dane techniczne

Rysunek produktu

Model 3D

□

Marking

Series	DSB
	DM

versions

Connection method	Axial screw connection
Female/Male	Female
	16A
	2 module

Dimension	6B
	10B
	16B
	24B
	48B
Number of positions	5
	15

Akcesoria

Dane biznesowe	
numer zamówienia	25010000005
Jednostka opakowania	
Minimalna ilość zamówienia	
Waga produktów (bez opakowania)	